



TECHNICAL SPECIFICATION

Receiver Dimensions: 113x 82 x 30(H/W/D)

Controller Dimensions: 85 x 75 x 23 (H/W/D)

Power Supply: AC200-240V, 50/60HZ

Load Current: 12/16 amp


Set-Point Temperature: 5°C to 35°C

INFRARED ACCESSORY STARGO CONTROLLER

Wiring Diagram for STW535

PARTNUMBER: STW535 -

Control your infrared heating with our sleek, 'Stargo' programmable thermostat. Offering accurate temperature control with an inbuilt sensor. Battery powered wireless control allowing the unit to be situated anywhere in the room. Backlit LCD screen for contemporary styling. 16AMP receiver to cater for different types of heating and wiring conditions.

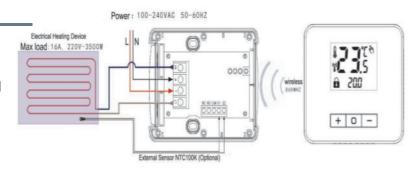

INSTALLATION RECOMMENDATIONS:



Up to a maximum loading of 3KW and additional use of a contactor this controller can be used with a multitude of heaters.



Comes with an external sensor probe for areas where a controller needs to be away from the temperature sensing area.



Design will blend in easily with a range of decors having a black and white edgeless finish means that it gives you a modernlook to wherever you put the controller.

KEY POINTS ON INFRARED HEATING:



HEAT WHAT YOU WANT DIRECTLY



NO MAINTENANCE WARRANTY



HIGH **ELECTRICAL** CONVERSION **EFFICIENT RATING OF** 98.5%



NON-DISRUPTIVE INSTALLATION



DOES NOT TAKE UP **VALUABLE** SPACE



NO MOVING **PARTS** NO NOISE



FIIIIY **PORTABLE**

E&OE







